
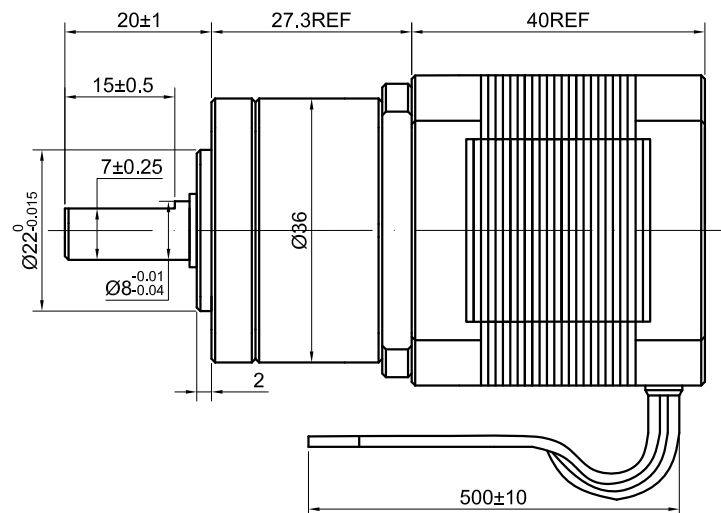


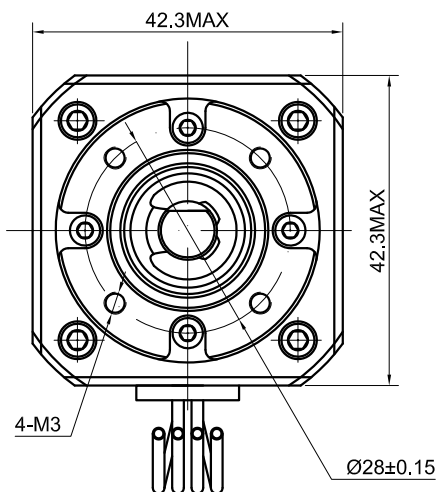


SPECIFICATION	CONNECTION	BIPOLAR
AMPS/PHASE		1.68
RESISTANCE/PHASE(Ohms)@25°C		1.65±10%
INDUCTANCE/PHASE(mH)@1KHz		3.20±20%
HOLDING TORQUE w/o GEARBOX(Nm)[lb-in]		0.36[3.19]
GEAR RATIO		5 ₁₁ ²
EFFICIENCY		90.00%
STEP ANGLE w/o GEARBOX(°)		1.80
BACKLASH@NO-LOAD		<=1°
MAX.PERMISSIBLE TORQUE(Nm)		2.00
MOMENT PERMISSIBLE TORQUE(Nm)		4.00
SHAFT MAXIMUM AXIAL LOAD(N)		50.00
SHAFT MAXIMUM RADIAL LOAD(N)		100.00
WEIGHT(Kg)[lb]		0.55[1.21]
TEMPERATURE RISE:MAX.80°C (MOTOR STANDSTILL;FOR 2PHASE ENERGIZED)		
AMBIENT TEMPERATURE -10°C~50°C[14°F~122°F]		
INSULATION CLASS B 130°C[266°F]		

TYPE OF CONNECTION (EXTERN)		MOTOR	
PIN NO	BIPOLAR	LEADS	WINDING
1	A —	BLK	
2	A\ —	GRN	
3	B —	RED	
4	B\ —	BLU	

FULL STEP 2 PHASE-Ex. ,
WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\		
1	+	+	-	-		CCW
2	-	+	+	-		
3	-	-	+	+		CW
4	+	-	-	+		



STEPPERONLINE®

	APVD		8.18.2018
	CHKD		
1:1	DRN		
SCALE	SIGNATURE	DATE	

STEPPER MOTOR

17HS15-1684S-PG5